



3FFI

Flat face couplings, ISO 16028, connection under pressure

Flat face couplings, connectable under residual pressure. Max working pressure 25 MPa (3625 psi). ISO 16028 interchangeable.



Applications

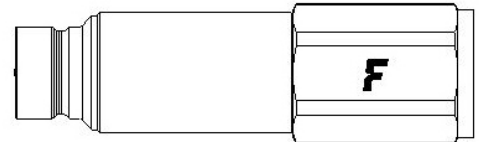

Seals	NBR & PUR
Material	Steel
Valve Type	Flat
Working temperatures	-25 °C to 100 °C
Surface treatment	MATE 500 (CrIII)
Series Interchange	ISO 16028
Connection	Push to Connect
Disconnection	Sleeve Retraction
Connection Under Pressure	Allowed Male Half up to W.P.