





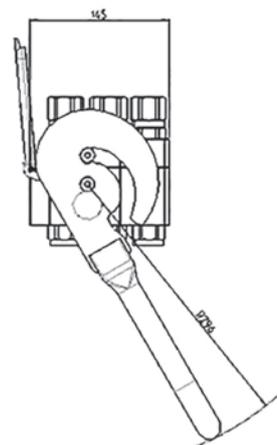

MF P12B

MultiFaster 12 lines, size 08.

Applications

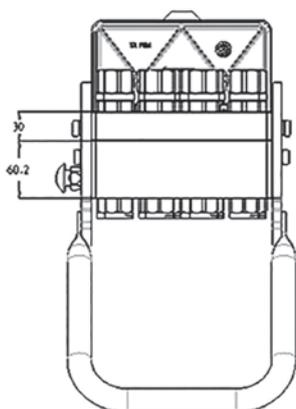

Technical Specifications

dash	Size		Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
	mm	inch				Male	Female	Male + Female
08	12.5	1/2"	25	70	0.01	100	64	100

Material **Stainless Steel**

Seals **FKM**

Working temperatures **- 20 °C to + 200 °C**

Surface treatment

Valve Type **Flat**

Connection **Lever**

Disconnection **Lever**

Connection Under Pressure **Allowed Residual**



P12B

Size					Thread Type					FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Connector Type	Part Number
08	12.5	1/2"	12	12	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE			2P12B-12-AF2V C

Size					Thread Type					MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Connector Type	Part Number
08	12.5	1/2"	12	12	F BSPP	ISO 1179-1	BSPP 1/2" FEMALE			2P12B-12-AM2V C

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
					SK MF 12		KIT TSP 38 M		

