MF P406A

MultiFaster 4 lines, size 06.

Applications

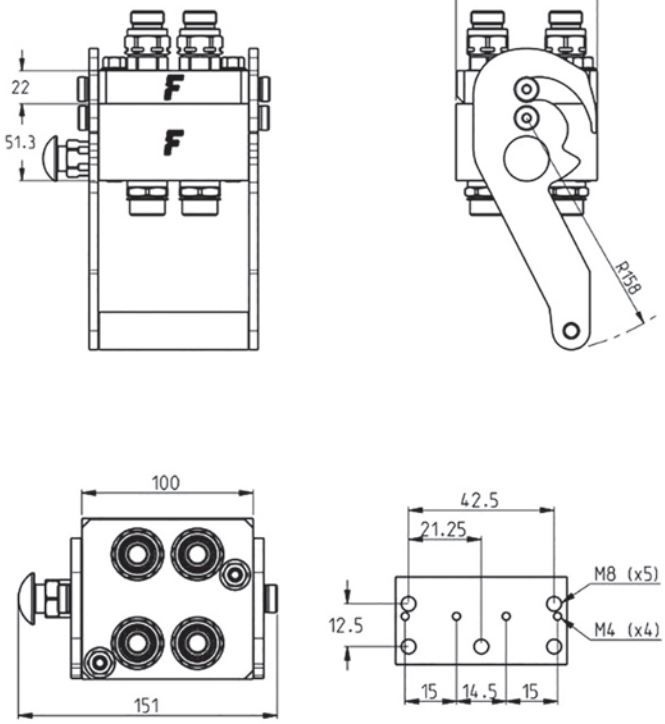

Technical Specifications

dash	Size mm	Size inch	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa) Male	Female	Male + Female
06	10	3/8"	25	40	0.008	100	100	110

Material	**Aluminium; Steel**
Seals	**NBR; PUR**
Working temperatures	**- 25 °C to + 100 °C**
Surface treatment	**MATE 500 (CrIII); Paint**

Valve Type	**Flat**
Connection	**Lever**
Disconnection	**Lever**
Connection Under Pressure	**Allowed Residual**

P406A

Size					Thread Type					FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Type	Part Number
06	10	3/8''	4	4	02/ METRIC	ISO 8434-1-L	M18x1.5 MALE 12L			2P406A-4-2/18FC

Size					Thread Type					MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical Connector N	Type	Part Number
06	10	3/8''	4	4	02/ METRIC	ISO 8434-1-L	M18x1,5 MALE 12L			2P406A-4-2/18MC

Spare Parts & Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
		KIT TA P406A	KIT SP5 S		SK MF 38	KIT VP4	KIT TSP 12 M	KIT GP4	

Couplings spare parts table is available on the Product catalogue (https://www.fastercouplings.com/catalogs), pages 381-383



02/