


# MF P506 HD



MultiFaster 4 lines, size 06.

## Applications

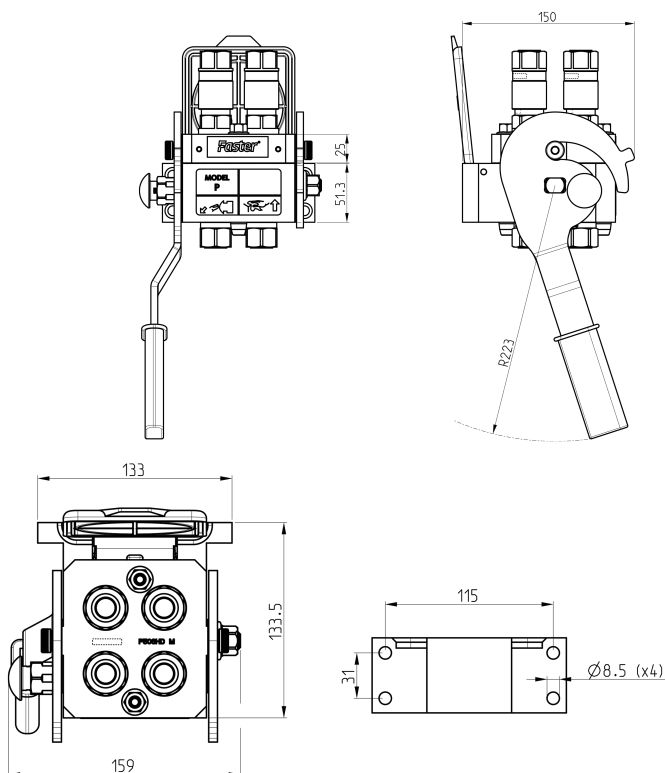

## Technical Specifications

dash	Size mm	inch	Working Pressure (MPa)	Flow Rate (l/min)	Spillage (ml)	Burst pressure (MPa)		
						Male	Female	Male + Female
06	10	3/8"	35	40	0.008	105	105	105

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 500 (CrIII); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual



## P506 HD

Size					Thread Type					FIXED
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical N	Connector Type	Part Number
06	10	3/8"	4	4	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE			P506HD-D-0000-4-A F C
06	10	3/8"	4	4	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE			P506HD-S-0000-4-A F C

Size					Thread Type					MOBILE
dash	mm	inch	Housing	Number of Couplings	Thread Type	Standard	Thread	Electrical N	Connector Type	Part Number
06	10	3/8"	4	4	F BSPP	ISO 1179-1	BSPP 3/8" FEMALE			P506HD-0000-4-A M C

## Spare Parts &amp; Accessories

Female Half				Male Half					
Plates	Lever	Dust cover	Safety Lock	Plates	Seals male	Screws	Plugs	Guiding pins	Docking
KIT P506HD F LD	KIT LP506HD	KIT TA P5	KIT SP5 S	KIT P506HD M	SK MF 38	KIT VP4	KIT TSP 38 M	KIT GP4	S P5
KIT P506HD F LS									

Couplings spare parts table is available on the Product catalogue (<https://www.fastercouplings.com/catalogs>), pages 388

