




MF P608

MultiFaster 6 lines, size 08.

Applications

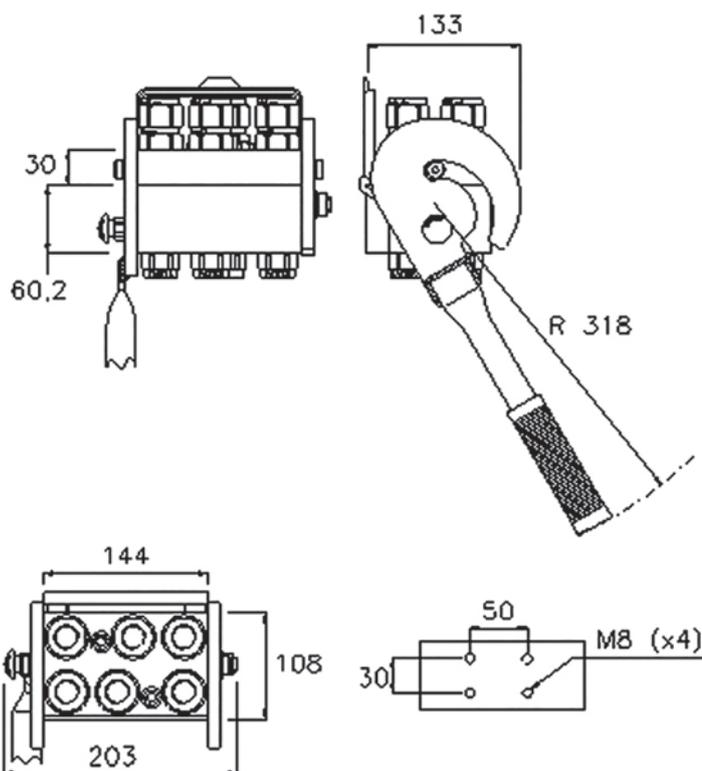

Technical Specifications

| dash | Size | | Working Pressure (MPa) | Flow Rate (l/min) | Spillage (ml) | Burst pressure (MPa) | | |
|------|------|------|------------------------|-------------------|---------------|----------------------|--------|---------------|
| | mm | inch | | | | Male | Female | Male + Female |
| 08 | 12.5 | 1/2" | 25 | 70 | 0.01 | 100 | 100 | 100 |



| | |
|----------------------|--------------------------------|
| Material | Aluminium; Steel |
| Seals | NBR; PUR |
| Working temperatures | - 25 °C to + 100 °C |
| Surface treatment | MATE 500 (CrIII); Paint |

| | |
|---------------------------|-------------------------|
| Valve Type | Flat |
| Connection | Lever |
| Disconnection | Lever |
| Connection Under Pressure | Allowed Residual |



P608

| Size | | | | | Thread Type | | | | | FIXED |
|------|------|------|---------|---------------------|-------------|-------------|------------------------------|--------------|----------------|-------------------|
| dash | mm | inch | Housing | Number of Couplings | Thread Type | Standard | Thread | Electrical N | Connector Type | Part Number |
| 08 | 12.5 | 1/2" | 6 | 6 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 3P608-6-12G F C |
| 08 | 12.5 | 1/2" | 6 | 4 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-B-4-C F C |
| 08 | 12.5 | 1/2" | | | | | | 2 | 7 PINS | |
| 08 | 12.5 | 1/2" | 6 | 5 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-A-5-12G F C |
| 08 | 12.5 | 1/2" | | | | | | 1 | 7 PINS | |
| 08 | 12.5 | 1/2" | 6 | 6 | O/ SAE | ISO 11926-1 | 1 - 1/16" - 12 UN FEMALE ORB | | | 2P608-6-34S F C |
| 08 | 12.5 | 1/2" | 6 | 6 | O/ SAE | ISO 11926-1 | 3/4" - 16 UNF FEMALE ORB | | | 2P608-6-12S F C |
| 08 | 12.5 | 1/2" | 6 | 4 | O/ SAE | ISO 11926-1 | 3/4" - 16 UNF FEMALE ORB | | | 2P608-4-12S F C |
| 08 | 12.5 | 1/2" | 6 | 4 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-2-4-12G F C |
| 08 | 12.5 | 1/2" | | | | | | 2 | 3 PINS | |
| 08 | 12.5 | 1/2" | 6 | 5 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-1-5-12G F C |
| 08 | 12.5 | 1/2" | | | | | | 1 | 3 PINS | |
| 08 | 12.5 | 1/2" | 6 | 6 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-6-12G F C |



P608

| Size | | | Thread Type | | | | MOBILE | | | |
|------|------|------|-------------|---------------------|-------------|-------------|------------------------------|------------------------|----------------|-------------------|
| dash | mm | inch | Housing | Number of Couplings | Thread Type | Standard | Thread | Electrical Connector N | Connector Type | Part Number |
| 08 | 12.5 | 1/2" | 6 | 4 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | 2 | 7 PINS | 3P608-B-4-12G M C |
| 08 | 12.5 | 1/2" | | | | | | | | |
| 08 | 12.5 | 1/2" | 6 | 5 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | 1 | 7 PINS | 3P608-A-5-12G M C |
| 08 | 12.5 | 1/2" | | | | | | | | |
| 08 | 12.5 | 1/2" | 6 | 6 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 3P608-6-12G M C |
| 08 | 12.5 | 1/2" | 6 | 5 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | 1 | 3 PINS | 3P608-1-5-12G M C |
| 08 | 12.5 | 1/2" | | | | | | | | |
| 08 | 12.5 | 1/2" | 6 | 6 | 11/ SAE | ISO 8434-3 | 13/16"-16 UN MALE ORFS | | | 2P608-6-8BC M C |
| 08 | 12.5 | 1/2" | 6 | 6 | 11/ SAE | ISO 8434-3 | 13/16"-16 UN MALE ORFS | | | 2P608-6-8B M C |
| 08 | 12.5 | 1/2" | 6 | 6 | 0/ SAE | ISO 11926-1 | 1 - 1/16" - 12 UN FEMALE ORB | | | 2P608-6-34S M C |
| 08 | 12.5 | 1/2" | 6 | 6 | 13/ SAE | ISO 8434-2 | 3/4"-16 UNF MALE JIC | | | 2P608-6-13/FS M C |
| 08 | 12.5 | 1/2" | 6 | 6 | 0/ SAE | ISO 11926-1 | 3/4" - 16 UNF FEMALE ORB | | | 2P608-6-12S M C |
| 08 | 12.5 | 1/2" | 6 | 5 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-5-12G M C |
| 08 | 12.5 | 1/2" | 6 | 4 | 11/ SAE | ISO 8434-3 | 13/16"-16 UN MALE ORFS | | | 2P608-4-H M C |
| 08 | 12.5 | 1/2" | 6 | 4 | 11/ SAE | ISO 8434-3 | 13/16"-16 UN MALE ORFS | | | 2P608-4-8BC M C |
| 08 | 12.5 | 1/2" | 6 | 4 | 11/ SAE | ISO 8434-3 | 13/16"-16 UN MALE ORFS | | | 2P608-4-8B M C |
| 08 | 12.5 | 1/2" | 6 | 4 | 0/ SAE | ISO 11926-1 | 3/4" - 16 UNF FEMALE ORB | | | 2P608-4-12S M C |
| 08 | 12.5 | 1/2" | 6 | 4 | 11/ SAE | ISO 8434-3 | 1"-14 UNS MALE ORFS | | | 2P608-4-11/GS M C |
| 08 | 12.5 | 1/2" | 6 | 4 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | 2 | 3 PINS | 2P608-2-4-12G M C |
| 08 | 12.5 | 1/2" | | | | | | | | |
| 08 | 12.5 | 1/2" | 6 | 6 | F BSPP | ISO 1179-1 | BSPP 1/2" FEMALE | | | 2P608-6-12G M C |

Spare Parts & Accessories

| Female Half | | | | Male Half | | | | | |
|--------------|-----------|-------------|-------------|------------|------------|---------|--------------|--------------|---------|
| Plates | Lever | Dust cover | Safety Lock | Plates | Seals male | Screws | Plugs | Guiding pins | Docking |
| KIT P608 F L | KIT LP608 | KIT TA P608 | KIT SP5 S | KIT P608 M | SK MF 12 | KIT VP8 | KIT TSP 38 M | KIT GP4 | S P608 |

